
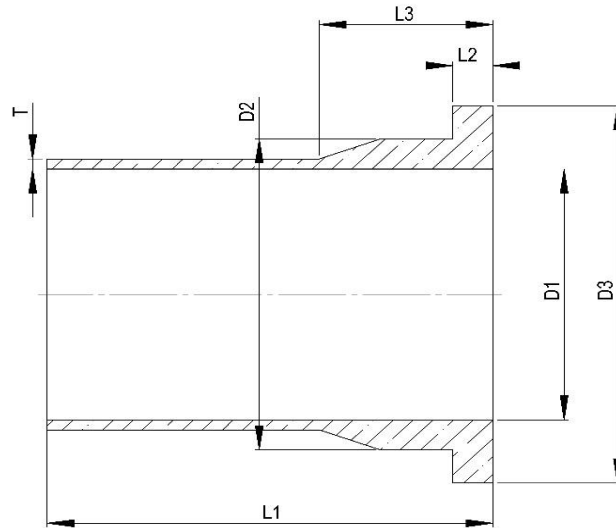


Stub flanges in Derakane 411 or equivalent
2.5 mm inner corrosion barrier
Contact moulding - Vinylester resin

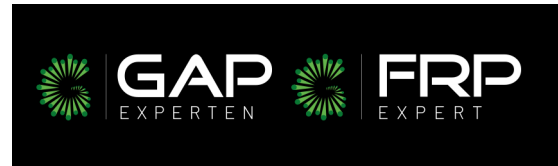

DN (mm)	PN (bar)	T (mm)	D2 (mm)	D1 (mm)	D3 (mm)	L1 (mm)	L2 (mm)	L3 (mm)
25	16	4	50	25	68	250	14	30
32	16	5	62	32	80	300	16	40
40	16	5	68	40	90	300	16	40
50	16	5	82	50	102	300	16	40
65	16	5	95	65	122	300	18	50
80	16	6	111	80	138	300	18	50
100	16	6	133	100	158	300	22	55
125	16	6	160	125	188	300	25	65
150	16	6	188	150	212	300	27	70
200	10	6	237	200	268	360	29	85
250	10	7	293	250	320	360	32	100
300	10	7	342	300	376	360	35	115
350	10	8	398	350	436	360	38	135
400	10	8	451	400	487	360	42	150
500	10	9	556	500	592	360	48	180

Disclaimer
 FRP-Expert can not accept responsibility for any omissions or inaccuracies due to incomplete or inaccurate information on this website.

FRP Experten
www.frpexpert.com

info@frp-expert.com
 +46 11-46 00 799