


T-rör Derakane 411 eller motsvarande PN16

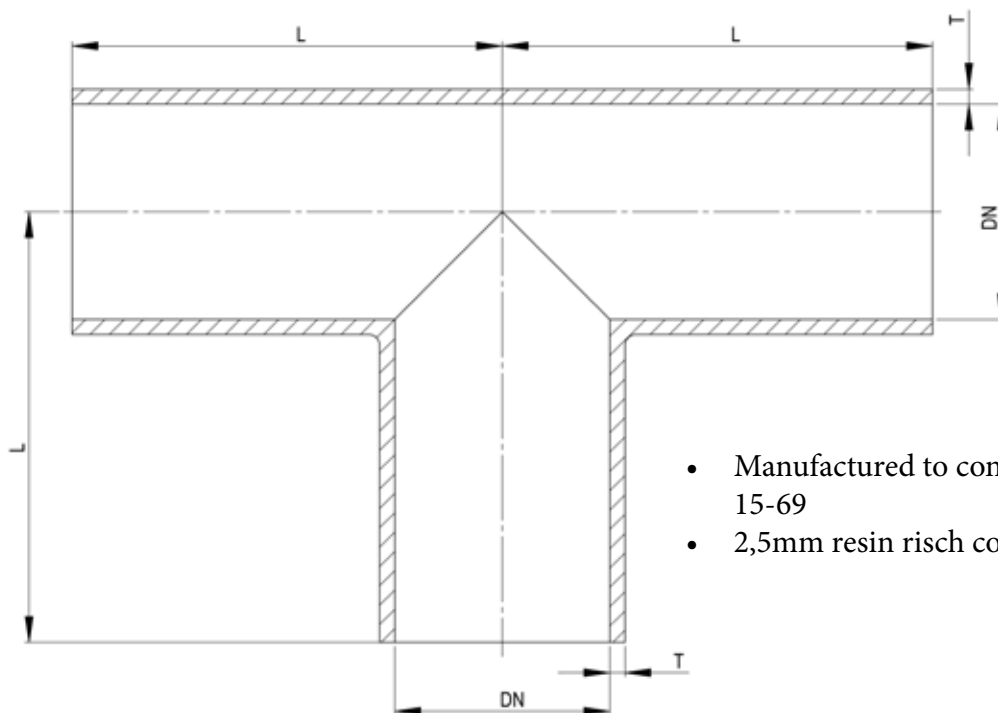

- Manufactured to conform to DIN & PS 15-69
- 2,5mm resin risch corrosion

| Size | Thickness(T)PN16 | Length (L) |
|------|------------------|------------|
| 25 | 5 | 110 |
| 32 | 5 | 120 |
| 40 | 5 | 125 |
| 50 | 5 | 150 |
| 65 | 5 | 160 |
| 80 | 6,5 | 175 |
| 100 | 6,5 | 200 |
| 125 | 6,5 | 225 |
| 150 | 8 | 250 |